




Website

Email:
sales@astralux-driver.com

Website:
astralux-driver.com

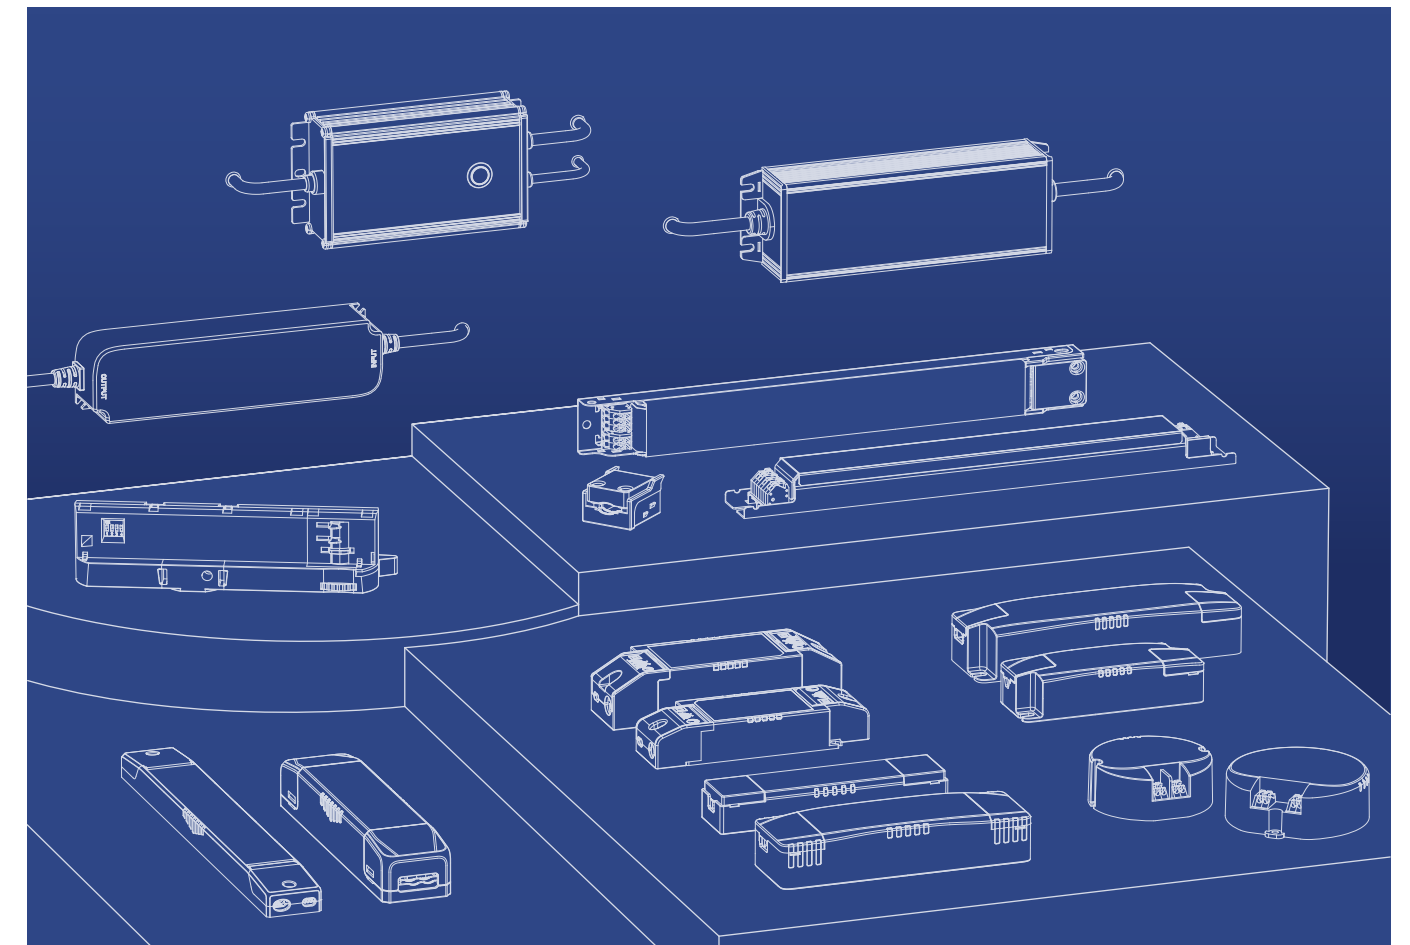

LED DRIVER CATALOGUE

КАТАЛОГ СВЕТОДИОДНЫХ
ДРАЙВЕРОВ

2026.08



ABOUT ASTRALUX

ASTRALUX is a fast-growing brand specializing in the LED power supply industry. We focus on the R&D, manufacturing, sales, and service of LED drivers. With two manufacturing bases located in Shunde (Foshan) and Ji'an (Jiangxi), we boast a total production area of 136,000 square meters. Equipped with robust R&D capabilities and digital manufacturing facilities, our products cover diverse lighting scenarios such as home lighting, commercial lighting, hotel lighting, and outdoor lighting, aiming to provide global customers with more efficient, intelligent, and green LED driver and lighting solutions.

О компании ASTRALUX

ASTRALUX - быстрорастущий бренд, специализирующийся на производстве светодиодных источников питания. Мы специализируемся на исследованиях и разработках, производстве, продаже и обслуживании светодиодных драйверов. Располагая двумя производственными базами, расположенными в Шунде (Фошань) и Цзиане (Цзянси), мы можем похвастаться общей производственной площадью в 136, 000 кв.м. Оснащенные мощным научно-исследовательским потенциалом и цифровыми производственными мощностями, наши продукты подходят для различных сценариев освещения, таких как домашнее освещение, коммерческое освещение, освещение в отелях и наружное освещение, с целью предоставления клиентам по всему миру более эффективных, интеллектуальных и экологичных светодиодных драйверов и осветительных решений.

CHOOSE US

Выбери нас

136_к

Площадь компании: 136 тыс. кв. м.
136K Sqm Company area

8


8 автоматических
производственных линий
8 Automatic production lines

100_{mil}

Годовая производственная мощность:
100 миллионов единиц
100Mil Annual production capacity

150₊


150+ опытных инженеров
150+ Experienced Engineers

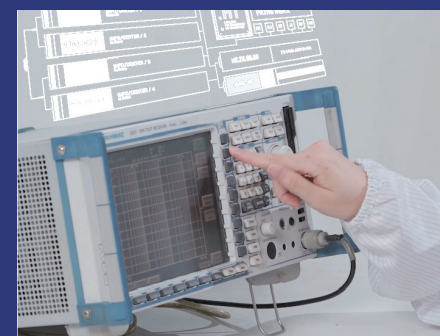


WIRING DIAGRAM

МОНТАЖНУЮ схему


DALI dimming application

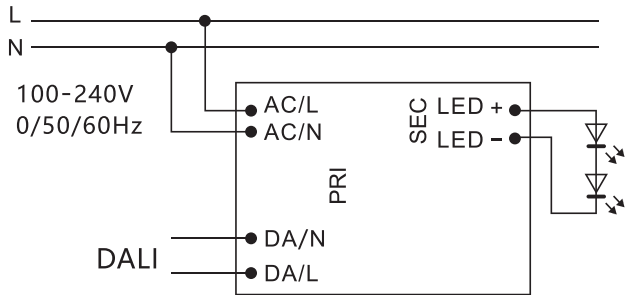


Push dimming application

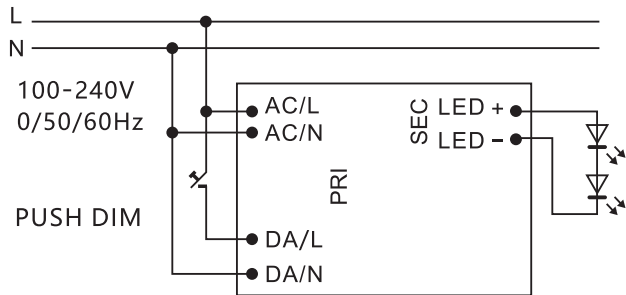


DALI-2 DT8 dimming application

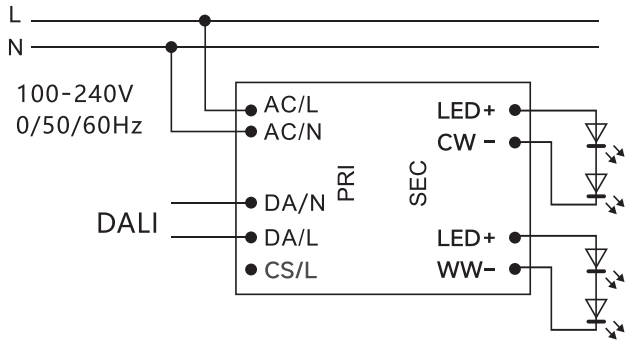


Corridor Mode dimming application

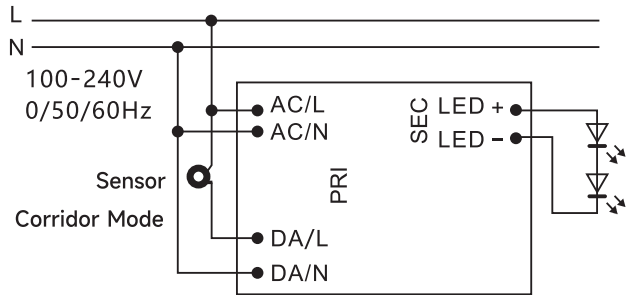

Triac dimming application

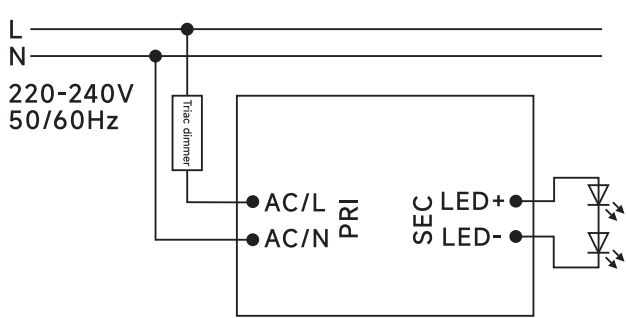

0-10V dimming application

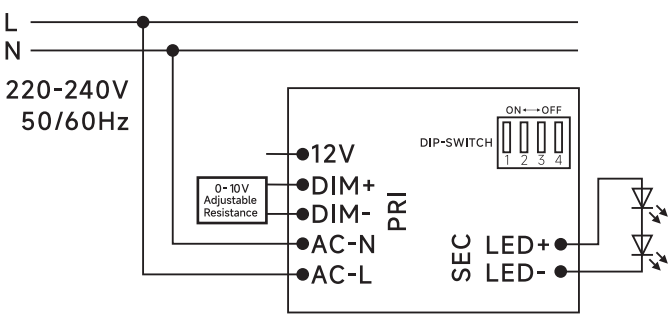

NAMING RULES

Правила присвоения имен

Adjustable or not		FLS-30-700	IP67	N-S	DALI-2	LI1	EXC	S	-YX	Customer Abbreviation
F	Output current adjustable									Custom products made for special customers
P	Offline programmable									
Shape										
C	Circle									
L	Long Rectangles (2.0≤L:W<4.0)									
S	Square Plastic (L:W<2.0)									
M	Metal Rectangles									
N	Bare board, no shell									
D	Intergrated									
U	Ultrathin (height less than 18mm)									
R	Oval, horseshoe shape									
Input Voltage										
S	220-240 VAC									
H	100-240 VAC									
E	100-120 VAC									
X	100-277 VAC									
N	USA 120 VAC									
W	USA 120-277 VAC									
Z	USA 120-347 VAC									
Output Power										
9	9W									
30	30W									
1200	1200W									
Output Current/ Voltage										
C.C: 120--120mA / 1050--1050mA										
C.V : 5--5V / 12--12V / 24-24V										
IP Grade (optional)										
IP20	Defaultly empty									
IP65	IP65									
IP67	IP67									
[N-S] Non-isolation(optional)										
Dimming Mode (optional)										
DALI-2	DALI Dimming									
0-10	0-10V Dimming									
1-10 (European)	1-10V Dimming									
Blue	Bluetooth Dimming									
CSB	Casambi Dimming									
Zigb	Zigbee Dimming									
PWM	PWM Dimming									
RF	RF Dimming									
TRIAC	TRIAC Dimming									
DT8	DALI Dimming; color temperature is adjustable									
CCT	Color temperature is adjustable									
ON/OFF	Wall Switch Dimming									
Change Appearance (Optional)										
S	Appearance size reduced, small/silm									
Version (optional)										
E	Basic version									
EXC	Basic version, 0.9 PF									
ADV	Advanced version									
PRO	Professional version									
Generation Number (optional)										
1	First generation									
2	Second generation									
Output Adjustment Mode Terminal & Cable										
Output current not adjustable:										
I	Terminal/ Independent									
X	Terminal/ Built-in									
B	Cable/ Built-in									
R	2 slots									
Output current adjustable:										
A	Dip switch/ Terminal/ Independent									
S	Dip switch/ 2 slots									
N	NFC/ Terminal/ Built-in									
D	Dip switch/ Terminal/ Built-in									
Power Factor & Flicker										
L	0.9PF & flicker-free									
M	0.8PF & flicker-free									
S	0.5PF & flicker-free									
R	0.9PF & flicker									

LINEAR

Non-Isolated
- D4i



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-35-350 N-S DALI-2 D4i LN	35W	220-240VAC	80-350mA	50-220V	92%	0.95	280*30*21mm
	FMS-75-500 N-S DALI-2 D4i LN	75W	220-240VAC	150-500mA	50-220V	93%	0.95	360*30*21mm
	FMS-100-1050 N-S DALI-2 D4i LN	100W	220-240VAC	300-1050mA	50-220V	94%	0.95	360*30*21mm
	FMS-150-1050 N-S DALI-2 D4i LN	150W	220-240VAC	300-1050mA	50-220V	95%	0.95	360*30*21mm

Non-Isolated
- DALI-2



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-35-350 N-S DALI-2 LD	35W	220-240VAC	80-350mA	50-220V	92%	0.95	280*30*21mm
	FMS-75-500 N-S DALI-2 LD	75W	220-240VAC	150-500mA	50-220V	93%	0.95	280*30*21mm
	FMS-100-1050 N-S DALI-2 LD	100W	220-240VAC	300-1050mA	50-220V	94%	0.95	280*30*21mm
	FMS-150-1050 N-S DALI-2 LD	150W	220-240VAC	300-1050mA	50-220V	95%	0.95	280*30*21mm
	FMS-35-350 N-S DALI-2 LN EXC	35W	220-240VAC	80-350mA	50-220V	92%	0.95	280*30*21mm
	FMS-75-500 N-S DALI-2 LN EXC	75W	220-240VAC	150-500mA	50-220V	93%	0.95	280*30*21mm
	FMS-100-1050 N-S DALI-2 LN EXC	100W	220-240VAC	300-1050mA	50-220V	94%	0.95	280*30*21mm
	FMS-150-1050 N-S DALI-2 LN EXC	150W	220-240VAC	300-1050mA	50-220V	95%	0.95	280*30*21mm

Non-Isolated
- ON/OFF (Dip Switch)



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-20-350 N-S LD2 E	20W	220-240VAC	200-350mA	25-100V	86%	0.95	168*30*21mm
	FMS-40-350 N-S LD2 E	40W	220-240VAC	200-350mA	40-200V	90%	0.95	168*30*21mm
	FMS-60-350 N-S LD2 E	60W	220-240VAC	200-350mA	70-200V	92%	0.95	190*30*21mm
	FMS-80-350 N-S LD2 E	80W	220-240VAC	200-350mA	40-220V	94%	0.95	210*30*21mm
	FMS-20-350 N-S LD1 E	20W	220-240VAC	200-350mA	25-100V	86%	0.9	168*30*21mm
	FMS-40-350 N-S LD1 E	40W	220-240VAC	200-350mA	40-200V	90%	0.9	168*30*21mm
	FMS-60-350 N-S LD1 E	60W	220-240VAC	200-350mA	70-200V	92%	0.95	190*30*21mm
	FMS-80-350 N-S LD1 E	80W	220-240VAC	200-350mA	40-220V	94%	0.95	210*30*21mm
	FMS-80-550 N-S LD1 E	80W	220-240VAC	350-550mA	40-216V	93%	0.95	210*30*21mm
	FMS-100-500 N-S LD1 E	100W	220-240VAC	350-500mA	40-220V	95%	0.95	280*30*21mm
	FMS-150-700 N-S LD1 E	150W	220-240VAC	550-700mA	40-220V	95%	0.95	280*30*21mm

Isolated
- DALI+0-10V



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMX-35-700 DALI-2 0-10 LD	35W	120-277VAC	150-700mA	15-51V	90%	0.95	280*30*21mm
	FMX-50-1050 DALI-2 0-10 LD	50W	120-277VAC	300-1050mA	15-51V	90%	0.95	280*30*21mm
	FMX-85-2100 DALI-2 0-10 LD	85W	120-277VAC	700-2100mA	15-51V	90%	0.95	360*30*21mm

LINEAR

Isolated
- DALI-2



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-35-700 DALI-2 LD	35W	220-240VAC	100-700mA	15-51V	90%	0.95	280*30*21mm
	FMS-50-1050 DALI-2 LD	50W	220-240VAC	350-1050mA	15-51V	90%	0.95	280*30*21mm
	FMS-75-1800 DALI-2 LD	75W	220-240VAC	1050-1800mA	15-51V	90%	0.95	280*30*21mm
	FMS-35-700 DALI-2 LN	35W	220-240VAC	150-700mA	15-51V	90%	0.95	280*30*21mm
	FMS-50-1050 DALI-2 LN	50W	220-240VAC	350-1050mA	15-51V	90%	0.95	280*30*21mm
	FMS-75-1800 DALI-2 LN	75W	220-240VAC	1050-1800mA	15-51V	90%	0.95	280*30*21mm

Isolated
- 0-10V



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-25-600 0-10 LD	25W	220-240VAC	200-600mA	9-42V	85%	0.90	220*30*21mm
	FMS-44-1050 0-10 LD	44W	220-240VAC	650-1050mA	9-42V	88%	0.95	220*30*21mm
	FMS-60-1700 0-10 LD	60W	220-240VAC	1100-1700mA	12-42V	88%	0.95	325*30*21mm
	FMS-80-2000 0-10 LD	80W	220-240VAC	1550-2000mA	9-42V	88%	0.95	325*36*23mm
	FMS-40-350 0-10 LD-F	40W	220-240VAC	200-350mA	40-200V	88%	0.95	210*30*21mm
	FMS-60-350 0-10 LD-F	60W	220-240VAC	200-350mA	70-300V	88%	0.90	280*30*21mm
	FMS-60-700 0-10 LD-F	60W	220-240VAC	400-700mA	40-150V	88%	0.95	280*30*21mm

Isolated
- ON/OFF (DIP-switch)



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FMS-20-350 LD EXC	20W	220-240VAC	200-350mA	15-51V	88%	0.95	210*30*21mm
	FMS-24-500 LD EXC	24W	220-240VAC	350-500mA	15-51V	88%	0.95	210*30*21mm
	FMS-35-650 LD EXC	35W	220-240VAC	500-650mA	15-51V	90%	0.95	210*30*21mm
	FMS-40-1050 LD EXC	40W	220-240VAC	700-1050mA	15-51V	90%	0.95	210*30*21mm
	FMS-60-1200 LD EXC	60W	220-240VAC	850-1200mA	15-51V	91%	0.95	280*30*21mm
	FMS-60-1500 LD EXC	60W	220-240VAC	1150-1500mA	15-51V	90%	0.95	280*30*21mm
	FMS-75-1500 LD EXC	75W	220-240VAC	1150-1500mA	15-51V	91%	0.95	280*30*21mm
	FMS-80-2000 LD EXC	80W	220-240VAC	1500-2000mA	15-51V	91%	0.95	280*30*21mm
	FMS-40-400 LD1-F	40W	220-240VAC	250-400mA	40-160V	90%	0.95	210*30*21mm
	FMS-40-450 LD1-F	40W	220-240VAC	250-450mA	40-160V	90%	0.95	210*30*21mm
	FMS-60-400 LD-F	60W	220-240VAC	250-400mA	70-240V	90%	0.95	280*30*21mm
	FMS-60-450 LD1-F	60W	220-240VAC	250-450mA	70-240V	90%	0.95	280*30*21mm
	FMS-60-700 LD-F	60W	220-240VAC	400-700mA	40-120V	91%	0.95	280*30*21mm

COMPACT

Intelligent
- DALI-2

CB

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-8-350 DALI-2 LD EXC	8W	220-240VAC	80-350mA	15-42V	80%	0.90	126*30*20.5mm
	FLS-12-500 DALI-2 LD EXC	12W	220-240VAC	150-500mA	15-42V	85%	0.95	126*30*20.5mm

Intelligent
- 0-10V

CB

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-8-220 0-10 LA ADV	8W	220-240VAC	120-220mA	15-42V	83%	0.95	115*30*20.5mm
	FLS-12-330 0-10 LA ADV	12W	220-240VAC	250-330mA	15-42V	84%	0.95	115*30*20.5mm
	FLS-15-350 0-10 LA	15W	220-240VAC	120-350mA	9-42V	80%	0.95	125*45*26mm
	FLS-25-600 0-10 LA	25W	220-240VAC	200-600mA	9-42V	84%	0.95	125*45*26mm
	FLS-44-1050 0-10 LA	44W	220-240VAC	650-1050mA	9-42V	85%	0.97	138*45*28mm
	FLS-60-1700 0-10 LA	60W	220-240VAC	1100-1700mA	12-42V	88%	0.95	150*45*30mm

Intelligent
- TRIAC


CB

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	CS-8-100 TRIAC LI	8W	220-240VAC	100mA	28-40V	78%	0.9	Φ56*25.5mm
	CS-8-120 TRIAC LI	8W	220-240VAC	120mA	28-40V	80%	0.9	Φ56*25.5mm
	CS-8-150 TRIAC LI	8W	220-240VAC	150mA	28-40V	80%	0.95	Φ56*25.5mm
	CS-8-180 TRIAC LI	8W	220-240VAC	180mA	28-40V	80%	0.95	Φ56*25.5mm
	CS-8-200 TRIAC LI	8W	220-240VAC	200mA	28-40V	80%	0.95	Φ56*25.5mm
	CS-15-250 TRIAC LI	15W	220-240VAC	250mA	28-40V	82%	0.9	Φ65*25mm
	CS-15-280 TRIAC LI	15W	220-240VAC	280mA	28-40V	82%	0.9	Φ65*25mm
	CS-15-300 TRIAC LI	15W	220-240VAC	300mA	28-40V	82%	0.95	Φ65*25mm
	CS-15-350 TRIAC LI	15W	220-240VAC	350mA	28-40V	82%	0.95	Φ65*25mm
	CS-22-400 TRIAC LI	22W	220-240VAC	400mA	28-40V	85%	0.95	Φ65*25mm
	CS-22-450 TRIAC LI	22W	220-240VAC	450mA	28-40V	85%	0.95	Φ65*25mm
	CS-22-500 TRIAC LI	22W	220-240VAC	500mA	28-40V	85%	0.95	Φ65*25mm
	CS-22-550 TRIAC LI	22W	220-240VAC	550mA	28-40V	85%	0.95	Φ65*25mm
	CS-36-600 TRIAC LI	36W	220-240VAC	600mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-650 TRIAC LI	36W	220-240VAC	650mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-700 TRIAC LI	36W	220-240VAC	700mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-750 TRIAC LI	36W	220-240VAC	750mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-800 TRIAC LI	36W	220-240VAC	800mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-850 TRIAC LI	36W	220-240VAC	850mA	28-40V	85%	0.95	Φ75*26mm
	CS-36-900 TRIAC LI	36W	220-240VAC	900mA	28-40V	85%	0.95	Φ75*26mm

COMPACT

Intelligent
- TRIAC

CB

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-8-120 TRIAC LI EXC	8W	220-240VAC	120mA	27-40V	75%	0.90	115*30*20.5mm
	LS-8-200 TRIAC LI EXC	8W	220-240VAC	200mA	27-40V	80%	0.90	115*30*20.5mm
	LS-8-220 TRIAC LI EXC	8W	220-240VAC	220mA	27-40V	83%	0.90	115*30*20.5mm
	LS-12-250 TRIAC LI EXC	12W	220-240VAC	250mA	27-40V	83%	0.90	115*30*20.5mm
	LS-12-300 TRIAC LI EXC	12W	220-240VAC	300mA	27-40V	83%	0.90	115*30*20.5mm
	LS-12-350 TRIAC LI EXC	12W	220-240VAC	350mA	27-40V	83%	0.90	115*30*20.5mm
	LS-8-100 TRIAC LI I	8W	220-240VAC	100mA	28-40V	78%	0.90	92*36*25mm
	LS-8-120 TRIAC LI I	8W	220-240VAC	120mA	28-40V	80%	0.90	92*36*25mm
	LS-8-150 TRIAC LI I	8W	220-240VAC	150mA	28-40V	80%	0.95	92*36*25mm
	LS-8-180 TRIAC LI I	8W	220-240VAC	180mA	28-40V	80%	0.95	92*36*25mm
	LS-8-200 TRIAC LI I	8W	220-240VAC	200mA	28-40V	80%	0.95	92*36*25mm
	LS-8-220 TRIAC LI I	8W	220-240VAC	220mA	28-40V	80%	0.95	92*36*25mm
	LS-8-250 TRIAC LI I	8W	220-240VAC	250mA	18-24V	80%	0.95	92*36*25mm
	LS-8-300 TRIAC LI I	8W	220-240VAC	300mA	18-24V	80%	0.95	92*36*25mm
	LS-8-350 TRIAC LI I	8W	220-240VAC	350mA	18-24V	80%	0.95	92*36*25mm
	LS-8-700 TRIAC LI I	8W	220-240VAC	700mA	8-11.4V	76%	0.95	92*36*25mm
	LS-15-250 TRIAC LI I	15W	220-240VAC	250mA	28-40V	82%	0.95	102*38.2*25mm
	LS-15-280 TRIAC LI I	15W	220-240VAC	280mA	28-40V	82%	0.95	102*38.2*25mm
	LS-15-300 TRIAC LI I	15W	220-240VAC	300mA	28-40V	82%	0.95	102*38.2*25mm
	LS-15-350 TRIAC LI I	15W	220-240VAC	350mA	28-40V	82%	0.95	102*38.2*25mm
	LS-15-400 TRIAC LI I	15W	220-240VAC	400mA	25-38V	82%	0.95	102*38.2*25mm
	LS-15-450 TRIAC LI I	15W	220-240VAC	450mA	22-33V	82%	0.95	102*38.2*25mm
	LS-15-500 TRIAC LI I	15W	220-240VAC	500mA	20-30V	82%	0.95	102*38.2*25mm
	LS-15-550 TRIAC LI I	15W	220-240VAC	550mA	17-27V	82%	0.95	102*38.2*25mm
	LS-15-600 TRIAC LI I	15W	220-240VAC	600mA	16-25V	82%	0.95	102*38.2*25mm
	LS-15-650 TRIAC LI I	15W	220-240VAC	650mA	16-23V	82%	0.95	102*38.2*25mm
	LS-15-700 TRIAC LI I	15W	220-240VAC	700mA	14-22V	82%	0.95	102*38.2*25mm
	LS-20-300 TRIAC LI I	20W	220-240VAC	300mA	50-68V	85%	0.95	102*38.2*25mm
	LS-20-350 TRIAC LI I	20W	220-240VAC	350mA	40-60V	85%	0.95	102*38.2*25mm
	LS-20-400 TRIAC LI I	20W	220-240VAC	400mA	28-40V	85%	0.95	102*38.2*25mm
	LS-20-450 TRIAC LI I	20W	220-240VAC	450mA	28-40V	85%	0.95	102*38.2*25mm
	LS-20-500 TRIAC LI I	20W	220-240VAC	500mA	28-40V	85%	0.95	102*38.2*25mm
	LS-20-550 TRIAC LI I	20W	220-240VAC	550mA	28-38V	85%	0.95	102*38.2*25mm
	LS-20-600 TRIAC LI I	20W	220-240VAC	600mA	22-34V	85%	0.95	102*38.2*25mm
	LS-20-650 TRIAC LI I	20W	220-240VAC	650mA	20-30V	85%	0.95	102*38.2*25mm
	LS-20-700 TRIAC LI I	20W	220-240VAC	700mA	20-30V	85%	0.95	102*38.2*25mm
	LS-30-600 TRIAC LI I	30W	220-240VAC	600mA	35-50V	86%	0.95	135*41*25mm
	LS-30-650 TRIAC LI I	30W	220-240VAC	650mA	30-45V	86%	0.95	135*41*25mm
	LS-30-700 TRIAC LI I	30W	220-240VAC	700mA	28-42V	86%	0.95	135*41*25mm
	LS-30-750 TRIAC LI I	30W	220-240VAC	750mA	28-40V	86%	0.95	135*41*25mm
	LS-30-800 TRIAC LI I	30W	220-240VAC	800mA	28-40V	86%	0.95	135*41*25mm
	LS-30-850 TRIAC LI I	30W	220-240VAC	850mA	24-37V	86%	0.95	135*41*25mm
	LS-30-900 TRIAC LI I	30W	220-240VAC	900mA	22-34V	86%	0.95	135*41*25mm
	LS-40-700 TRIAC LI I	40W	220-240VAC	700mA	36-54V	87%	0.95	135*41*25mm
	LS-40-750 TRIAC LI I	40W	220-240VAC	750mA	35-53V	87%	0.95	135*41*25mm
	LS-40-800 TRIAC LI I	40W	220-240VAC	800mA	33-50V	87%	0.95	135*41*25mm
	LS-40-850 TRIAC LI I	40W	220-240VAC	850mA	31-47V	87%	0.95	135*41*25mm
	LS-40-900 TRIAC LI I	40W	220-240VAC	900mA	27-42V	87%	0.95	135*41*25mm
	LS-40-950 TRIAC LI I	40W	220-240VAC	950mA	28-40V	87%	0.95	135*41*25mm
	LS-40-1000 TRIAC LI I	40W	220-240VAC	1000mA	28-40V	87%	0.95	135*41*25mm
	LS-40-1050 TRIAC LI I	40W	220-240VAC	1050mA	28-40V	87%	0.95	135*41*25mm

COMPACT

ON/OFF
- Fixed Current



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
SH-3-300 IP65 SB	3W	100-240VAC	300mA	2.5-12V	68%	0.50	47*23*21mm
SH-3-350 IP65 SB	3W	100-240VAC	350mA	2.5-10V	68%	0.50	47*23*21mm
SH-3-500 IP65 SB	3W	100-240VAC	500mA	2.5-7V	68%	0.50	47*23*21mm
SH-3-700 IP65 SB	3W	100-240VAC	700mA	2.5-4.5V	68%	0.50	47*23*21mm
SS-9-350 MB-G	9W	220-240VAC	350mA	15-26V	78%	0.80	60*34*23.5mm
SS-9-700 MB-G	9W	220-240VAC	700mA	7-13V	78%	0.80	60*34*23.5mm
SS-12-350 MB-G	12W	220-240VAC	350mA	20-34.5V	81%	0.80	60*34*23.5mm
SS-12-700 MB-G	12W	220-240VAC	700mA	10-18V	81%	0.80	60*34*23.5mm
SS-9-350 MX-G	9W	220-240VAC	350mA	15-26V	81%	0.70	55*41*21.5mm
SS-9-700 MX-G	9W	220-240VAC	700mA	7-13V	81%	0.70	55*41*21.5mm
SS-12-350 MX-G	12W	220-240VAC	350mA	15-26V	81%	0.70	55*41*21.5mm
SS-12-700 MX-G	12W	220-240VAC	700mA	7-13V	81%	0.70	55*41*21.5mm


ON/OFF
- Hot Sale



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
LS-3-150 SI E	3W	220-240VAC	150mA	5-12V	68%	0.45	84*20.5*16.5mm
LS-3-300 SI E	3W	220-240VAC	300mA	5-12V	73%	0.45	84*20.5*16.5mm
LS-3-350 SI E	3W	220-240VAC	350mA	5-12V	73%	0.45	84*20.5*16.5mm
LS-3-500 SI E	3W	220-240VAC	500mA	2.5-4.5V	73%	0.45	84*20.5*16.5mm
LS-3-700 SI E	3W	220-240VAC	700mA	2.5-4.5V	71%	0.45	84*20.5*16.5mm
LS-6-120 SI E	6W	220-240VAC	120mA	27-40V	76%	0.50	84*20.5*16.5mm
LS-6-150 SI E	6W	220-240VAC	150mA	27-40V	76%	0.50	84*20.5*16.5mm
LS-6-180 SI E	6W	220-240VAC	180mA	27-40V	76%	0.50	84*20.5*16.5mm
LS-6-200 SI E	6W	220-240VAC	200mA	27-40V	76%	0.50	84*20.5*16.5mm
LS-6-220 SI E	6W	220-240VAC	220mA	27-40V	76%	0.50	84*20.5*16.5mm
LS-6-250 SI E	6W	220-240VAC	250mA	10-24V	76%	0.50	84*20.5*16.5mm
LS-6-300 SI E	6W	220-240VAC	300mA	8-20V	76%	0.50	84*20.5*16.5mm
LS-6-350 SI E	6W	220-240VAC	350mA	8-18V	76%	0.50	84*20.5*16.5mm
LS-6-500 SI E	6W	220-240VAC	500mA	5-12V	76%	0.50	84*20.5*16.5mm
LS-6-550 SI E	6W	220-240VAC	550mA	5-11V	76%	0.50	84*20.5*16.5mm
LS-6-700 SI E	6W	220-240VAC	700mA	4-9V	76%	0.50	84*20.5*16.5mm
LS-8-180 SI E1	8W	220-240VAC	180mA	30-42V	73%	0.50	84*20.5*16.5mm
LS-8-200 SI E1	8W	220-240VAC	200mA	30-42V	73%	0.50	84*20.5*16.5mm
LS-8-220 SI E1	8W	220-240VAC	220mA	30-42V	73%	0.50	84*20.5*16.5mm
LS-8-500 SI E1	8W	220-240VAC	500mA	13-18V	73%	0.50	84*20.5*16.5mm
LS-8-700 SI E1	8W	220-240VAC	700mA	8-13V	73%	0.50	84*20.5*16.5mm

COMPACT

ON/OFF
- Hot Sale

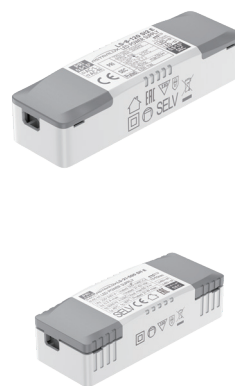

Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
LS-8-150 SI2 E	8W	220-240VAC	150mA	30-40V	80%	0.60	92*28*21mm
LS-8-200 SI2 E	8W	220-240VAC	200mA	30-40V	80%	0.60	92*28*21mm
LS-12-250 SI2 E	12W	220-240VAC	250mA	30-40V	82%	0.60	92*28*21mm
LS-12-300 SI2 E	12W	220-240VAC	300mA	30-40V	82%	0.60	92*28*21mm
LS-12-350 SI2 E	12W	220-240VAC	350mA	30-40V	82%	0.60	92*28*21mm
LS-21-300 SI1 E	21W	220-240VAC	300mA	40-70V	85%	0.60	92*36*25mm
LS-21-450 SI1 E	21W	220-240VAC	450mA	30-42V	85%	0.60	92*36*25mm
LS-21-600 SI1 E	21W	220-240VAC	600mA	27-39V	85%	0.60	92*36*25mm

ON/OFF
- High PF



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
LS-8-150 LI1 EXC	8W	220-240VAC	150mA	27-42V	78%	0.95	92*36*25mm
LS-8-200 LI1 EXC	8W	220-240VAC	200mA	27-40V	80%	0.95	92*36*25mm
LS-12-250 LI2 EXC	12W	220-240VAC	250mA	27-42V	82%	0.95	92*36*25mm
LS-12-280 LI2 EXC	12W	220-240VAC	280mA	27-42V	82%	0.95	92*36*25mm
LS-12-300 LI2 EXC	12W	220-240VAC	300mA	27-42V	82%	0.95	92*36*25mm
LS-15-350 LI2 EXC	15W	220-240VAC	350mA	27-40V	81%	0.95	92*36*25mm
LS-21-400 LI2 EXC	21W	220-240VAC	400mA	27-42V	85%	0.95	102*38.2*25mm
LS-21-450 LI2 EXC	21W	220-240VAC	450mA	27-42V	85%	0.95	102*38.2*25mm
LS-21-500 LI2 EXC	21W	220-240VAC	500mA	27-42V	86%	0.95	102*38.2*25mm
LS-40-600 LI1 EXC S	40W	220-240VAC	600mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-650 LI1 EXC S	40W	220-240VAC	650mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-700 LI1 EXC S	40W	220-240VAC	700mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-750 LI1 EXC S	40W	220-240VAC	750mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-800 LI1 EXC S	40W	220-240VAC	800mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-850 LI1 EXC S	40W	220-240VAC	850mA	24-42V	89%	0.95	102*38.2*25mm
LS-40-900 LI1 EXC S	40W	220-240VAC	900mA	24-42V	90%	0.95	102*38.2*25mm
LS-40-950 LI1 EXC S	40W	220-240VAC	950mA	24-42V	90%	0.95	102*38.2*25mm
LS-40-1000 LI1 EXC S	40W	220-240VAC	1000mA	24-40V	90%	0.95	102*38.2*25mm
LS-40-1050 LI1 EXC S	40W	220-240VAC	1050mA	24-38V	90%	0.95	102*38.2*25mm

COMPACT

ON/OFF
- High PF



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
LS-50-500 LI EXC	50W	220-240VAC	500mA	30-84V	91%	0.95	116*41.2*26mm
LS-50-600 LI EXC	50W	220-240VAC	600mA	30-84V	91%	0.95	116*41.2*26mm
LS-50-1100 LI EXC	50W	220-240VAC	1100mA	15-42V	91%	0.95	116*41.2*26mm
LS-50-1150 LI EXC	50W	220-240VAC	1150mA	15-42V	91%	0.95	116*41.2*26mm
LS-50-1200 LI EXC	50W	220-240VAC	1200mA	15-42V	91%	0.95	116*41.2*26mm
LS-50-1250 LI EXC	50W	220-240VAC	1250mA	15-40V	91%	0.95	116*41.2*26mm
LS-60-1050 LI EXC	60W	220-240VAC	1050mA	15-42V	90%	0.95	135*41.2*25mm
LS-60-1300 LI EXC	60W	220-240VAC	1300mA	15-42V	90%	0.95	135*41.2*25mm
LS-60-1350 LI EXC	60W	220-240VAC	1350mA	15-42V	90%	0.95	135*41.2*25mm
LS-60-1400 LI EXC	60W	220-240VAC	1400mA	15-42V	90%	0.95	135*41.2*25mm
LS-60-1450 LI EXC	60W	220-240VAC	1450mA	15-40V	90%	0.95	135*41.2*25mm
LS-60-1500 LI EXC	60W	220-240VAC	1500mA	15-40V	90%	0.95	135*41.2*25mm

ON/OFF
- High Eff.



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
FLS-15-350 LD1 ADV	15W	220-240VAC	200-350mA	28-40V	92%	0.95	116*41.2*26mm
FLS-21-500 LD1 ADV	21W	220-240VAC	350-500mA	28-40V	93%	0.95	116*41.2*26mm
FLS-30-750 LD1 ADV	30W	220-240VAC	600-750mA	28-40V	94%	0.95	116*41.2*26mm
FLS-40-1050 LD1 ADV	40W	220-240VAC	700-1050mA	28-40V	94%	0.95	116*41.2*26mm
LS-12-200 LI1 ADV	12W	220-240VAC	200mA	24-40V	92%	0.95	116*41.2*26mm
LS-12-250 LI1 ADV	12W	220-240VAC	250mA	24-40V	92%	0.95	116*41.2*26mm
LS-12-300 LI1 ADV	12W	220-240VAC	300mA	24-40V	92%	0.95	116*41.2*26mm
LS-12-350 LI1 ADV	12W	220-240VAC	350mA	24-40V	92%	0.95	116*41.2*26mm
LS-21-350 LI1 ADV	21W	220-240VAC	350mA	24-40V	93%	0.95	116*41.2*26mm
LS-21-400 LI1 ADV	21W	220-240VAC	400mA	24-40V	93%	0.95	116*41.2*26mm
LS-21-450 LI1 ADV	21W	220-240VAC	450mA	24-40V	93%	0.95	116*41.2*26mm
LS-21-500 LI1 ADV	21W	220-240VAC	500mA	24-40V	93%	0.95	116*41.2*26mm
LS-30-550 LI1 ADV	30W	220-240VAC	550mA	24-40V	93%	0.95	116*41.2*26mm
LS-30-600 LI1 ADV	30W	220-240VAC	600mA	24-40V	93%	0.95	116*41.2*26mm
LS-30-650 LI1 ADV	30W	220-240VAC	650mA	24-40V	93%	0.95	116*41.2*26mm
LS-30-700 LI1 ADV	30W	220-240VAC	700mA	24-40V	93%	0.95	116*41.2*26mm
LS-30-750 LI1 ADV	30W	220-240VAC	750mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-800 LI1 ADV	40W	220-240VAC	800mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-850 LI1 ADV	40W	220-240VAC	850mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-900 LI1 ADV	40W	220-240VAC	900mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-950 LI1 ADV	40W	220-240VAC	950mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-1000 LI1 ADV	40W	220-240VAC	1000mA	24-40V	93%	0.95	116*41.2*26mm
LS-40-1050 LI1 ADV	40W	220-240VAC	1050mA	24-40V	93%	0.95	116*41.2*26mm

COMPACT

ON/OFF
- High Eff.



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
LX-8-70 LI EXC	8W	100-277VAC	70mA	27-42V	67%	0.90	92*36*25mm
LX-8-100 LI EXC	8W	100-277VAC	100mA	27-42V	67%	0.90	92*36*25mm
LX-8-120 LI EXC	8W	100-277VAC	120mA	27-42V	75%	0.92	92*36*25mm
LX-8-150 LI EXC	8W	100-277VAC	150mA	27-42V	77%	0.95	92*36*25mm
LX-8-160 LI EXC	8W	100-277VAC	160mA	27-42V	77%	0.95	92*36*25mm
LX-8-180 LI EXC	8W	100-277VAC	180mA	27-42V	78%	0.95	92*36*25mm
LX-8-200 LI EXC	8W	100-277VAC	200mA	27-40V	79%	0.95	92*36*25mm
LX-8-220 LI EXC	8W	100-277VAC	220mA	27-40V	79%	0.95	92*36*25mm
LX-12-250 LI EXC	12W	100-277VAC	250mA	27-42V	78%	0.90	92*36*25mm
LX-12-280 LI EXC	12W	100-277VAC	280mA	27-42V	78%	0.90	92*36*25mm
LX-12-300 LI EXC	12W	100-277VAC	300mA	27-40V	78%	0.90	92*36*25mm
LX-21-350 LI EXC	21W	100-277VAC	350mA	27-44V	85%	0.95	102*38.2*25mm
LX-21-400 LI EXC	21W	100-277VAC	400mA	27-44V	85%	0.95	102*38.2*25mm
LX-21-450 LI EXC	21W	100-277VAC	450mA	27-44V	85%	0.95	102*38.2*25mm
LX-21-500 LI EXC	21W	100-277VAC	500mA	27-44V	85%	0.95	102*38.2*25mm
LX-21-550 LI EXC	21W	100-277VAC	550mA	27-38.5V	85%	0.95	102*38.2*25mm
LX-40-600 LI EXC	40W	100-277VAC	600mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-650 LI EXC	40W	100-277VAC	650mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-700 LI EXC	40W	100-277VAC	700mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-750 LI EXC	40W	100-277VAC	750mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-800 LI EXC	40W	100-277VAC	800mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-850 LI EXC	40W	100-277VAC	850mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-900 LI EXC	40W	100-277VAC	900mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-950 LI EXC	40W	100-277VAC	950mA	24-42V	84%	0.9	135*41.2*25mm
LX-40-1000 LI EXC	40W	100-277VAC	1000mA	24-40V	84%	0.9	135*41.2*25mm
LX-40-1050 LI EXC	40W	100-277VAC	1050mA	24-38.5V	84%	0.9	135*41.2*25mm

ON/OFF
- Round



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
CS-8-120 SI	8W	220-240VAC	120mA	30-40V	80%	0.5	Φ42.5*21mm
CS-8-150 SI	8W	220-240VAC	150mA	30-40V	80%	0.5	Φ42.5*21mm
CS-8-180 SI	8W	220-240VAC	180mA	30-40V	80%	0.5	Φ42.5*21mm
CS-8-200 SI	8W	220-240VAC	200mA	30-40V	80%	0.5	Φ42.5*21mm
CS-15-250 SI	15W	220-240VAC	250mA	27-42V	82%	0.5	Φ42.5*21mm
CS-15-300 SI	15W	220-240VAC	300mA	27-42V	82%	0.5	Φ42.5*21mm
CS-15-350 SI	15W	220-240VAC	350mA	27-42V	82%	0.5	Φ42.5*21mm
CS-22-350 SI	22W	220-240VAC	350mA	27-42V	85%	0.5	Φ50*22mm
CS-22-400 SI	22W	220-240VAC	400mA	27-42V	85%	0.5	Φ50*22mm
CS-22-450 SI	22W	220-240VAC	450mA	27-42V	85%	0.5	Φ50*22mm
CS-22-500 SI	22W	220-240VAC	500mA	27-42V	85%	0.5	Φ50*22mm
CS-22-550 SI	22W	220-240VAC	550mA	27-42V	85%	0.5	Φ50*22mm

COMPACT

ON/OFF
- Round



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
CS-24-450 LI	24W	220-240VAC	450mA	24-42V	87%	0.95	Φ56*25.5mm
CS-24-500 LI	24W	220-240VAC	500mA	24-42V	87%	0.95	Φ56*25.5mm
CS-24-550 LI	24W	220-240VAC	550mA	24-42V	88%	0.95	Φ56*25.5mm
CS-24-600 LI	24W	220-240VAC	600mA	24-40V	88%	0.95	Φ56*25.5mm
CS-30-600 LI	30W	220-240VAC	600mA	20-42V	89%	0.95	Φ65*25mm
CS-30-650 LI	30W	220-240VAC	650mA	20-42V	89%	0.95	Φ65*25mm
CS-30-700 LI	30W	220-240VAC	700mA	20-42V	89%	0.95	Φ65*25mm
CS-30-750 LI	30W	220-240VAC	750mA	24-40V	89%	0.95	Φ65*25mm
CS-42-800 LI	42W	220-240VAC	800mA	24-42V	90%	0.95	Φ65*25mm
CS-42-850 LI	42W	220-240VAC	850mA	24-42V	90%	0.95	Φ65*25mm
CS-42-900 LI	42W	220-240VAC	900mA	24-42V	90%	0.95	Φ65*25mm
CS-42-950 LI	42W	220-240VAC	950mA	24-42V	90%	0.95	Φ65*25mm
CS-42-1000 LI	42W	220-240VAC	1000mA	24-42V	90%	0.95	Φ65*25mm
CS-42-1050 LI	42W	220-240VAC	1050mA	24-40V	90%	0.95	Φ65*25mm
CS-8-100 SB	8W	220-240VAC	100mA	30-40V	80%	0.50	Φ42.5*21mm
CS-8-120 SB	8W	220-240VAC	120mA	30-40V	80%	0.50	Φ42.5*21mm
CS-8-150 SB	8W	220-240VAC	150mA	30-40V	80%	0.50	Φ42.5*21mm
CS-8-180 SB	8W	220-240VAC	180mA	30-40V	80%	0.60	Φ42.5*21mm
CS-8-200 SB	8W	220-240VAC	200mA	30-40V	80%	0.60	Φ42.5*21mm
CS-8-220 SB	8W	220-240VAC	220mA	30-40V	80%	0.60	Φ42.5*21mm
CS-15-250 SB	15W	220-240VAC	250mA	27-42V	82%	0.60	Φ42.5*21mm
CS-15-280 SB	15W	220-240VAC	280mA	27-42V	82%	0.60	Φ42.5*21mm
CS-15-300 SB	15W	220-240VAC	300mA	27-42V	82%	0.60	Φ42.5*21mm
CS-15-350 SB	15W	220-240VAC	350mA	27-42V	82%	0.60	Φ42.5*21mm
CS-15-400 SB	15W	220-240VAC	400mA	27-42V	82%	0.60	Φ42.5*21mm
CS-25-450 LB	25W	220-240VAC	450mA	24-42V	87%	0.95	Φ56*25.5mm
CS-25-500 LB	25W	220-240VAC	500mA	24-42V	87%	0.95	Φ56*25.5mm
CS-25-550 LB	25W	220-240VAC	550mA	24-42V	88%	0.95	Φ56*25.5mm
CS-25-600 LB	25W	220-240VAC	600mA	24-42V	88%	0.95	Φ56*25.5mm
CS-32-650 LB	32W	220-240VAC	650mA	24-42V	89%	0.95	Φ65*25mm
CS-32-700 LB	32W	220-240VAC	700mA	24-42V	89%	0.95	Φ65*25mm
CS-32-750 LB	32W	220-240VAC	750mA	24-42V	89%	0.95	Φ65*25mm
CS-32-800 LB	32W	220-240VAC	800mA	24-42V	89%	0.95	Φ65*25mm
CH-12-300 IP65 LB1	12W	100-240VAC	300mA	24-40V	81%	0.95	Φ55*26mm
CH-12-350 IP65 LB1	12W	100-240VAC	350mA	20-35V	81%	0.95	Φ55*26mm
CH-12-500 IP65 LB1	12W	100-240VAC	500mA	14-24V	81%	0.95	Φ55*26mm
CH-12-700 IP65 LB1	12W	100-240VAC	700mA	10.5-17.5V	81%	0.95	Φ55*26mm
CH-18-300 IP65 LB	18W	100-240VAC	300mA	36-60V	86%	0.95	Φ55*26mm
CH-18-350 IP65 LB	18W	100-240VAC	350mA	31-52V	86%	0.95	Φ55*26mm
CH-18-450 IP65 LB	18W	100-240VAC	450mA	24-40V	86%	0.95	Φ55*26mm
CH-18-700 IP65 LB	18W	100-240VAC	700mA	15.5-26V	87%	0.95	Φ55*26mm
CH-25-350 IP65 LB1	25W	100-240VAC	350mA	43-72V	86%	0.95	Φ65*28mm
CH-25-600 IP65 LB1	25W	100-240VAC	600mA	25-42V	86%	0.95	Φ65*28mm
CH-25-700 IP65 LB1	25W	100-240VAC	700mA	21.5-36V	86%	0.95	Φ65*28mm

MINI

Intelligent
- DALI + 0-10V



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
FLX-42-1050 DALI-2 0-10 LN PRO	42W	100-240VAC	150-1050mA	2.5-49V	89%	0.95	97*43*30mm

Intelligent
- DALI DT8



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
FLS-26-700 DALI-2 DT8 LD	12W	220-240V	150-300mA	24-42V	91%	0.95	98*43*22mm
FLS-44-1050 DALI-2 DT8 LD	30W	220-240V	350-700mA	24-42V	93%	0.95	98*43*22mm
FLS-20-500 DALI-2 DT8 LN ADV	20W	220-240VAC	150-500mA	2.5-49V	87%	0.95	98*43*22mm
FLS-42-1050 DALI-2 DT8 LN ADV	42W	220-240VAC	300-1050mA	2.5-49V	90%	0.95	113*43*25mm
FLS-20-500 DALI-2 DT8 LN PRO	20W	220-240VAC	80-500mA	2.5-49V	87%	0.95	98*43*22mm
FLS-42-1050 DALI-2 DT8 LN PRO	42W	220-240VAC	300-1050mA	2.5-49V	90%	0.95	113*43*25mm
FLS-60-1500 DALI-2 DT8 LN PRO	60W	220-240VAC	900-1500mA	9-49V	90%	0.95	123*43*25mm

Intelligent
- DALI-2



Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
FLS-30-700 DALI-2 LD ECO	30W	220-240VAC	150-700mA	24-42V	87%	0.97	97*43*30mm
FLS-44-1050 DALI-2 LD ECO	44W	220-240VAC	700-1050mA	24-42V	89%	0.97	97*43*30mm
FLS-8-500 DALI-2 LA ADV	8W	220-240VAC	150-500mA	2.5-49V	84%	0.95	115*30*20.5mm
FLS-12-700 DALI-2 LA ADV	12W	220-240VAC	500-700mA	2.5-24V	84%	0.95	115*30*20.5mm
FLS-16-450 DALI-2 LA ADV	16W	220-240VAC	100-450mA	2.5-42V	85%	0.95	115*30*20.5mm
FLS-42-1050 DALI-2 LD ADV	42W	220-240VAC	150-1050mA	2.5-52V	87%	0.95	97*43*30mm
FLS-12-300 DALI-2 LD1 ADV	12W	220-240VAC	150-300mA	24-42V	91%	0.95	98*43*22mm
FLS-30-700 DALI-2 LD1 ADV	30W	220-240VAC	350-700mA	24-42V	93%	0.95	98*43*22mm
FLS-42-1050 DALI-2 LD1 ADV	42W	220-240VAC	700-1050mA	24-42V	93%	0.95	98*43*22mm

MINI

Intelligent
- DALI-2



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-20-500 DALI-2 LD PRO	20W	220-240VAC	80-500mA	2.5-49V	87%	0.95	88*40*22mm
	FLS-30-700 DALI-2 LD PRO	30W	220-240VAC	150-700mA	2.5-49V	90%	0.95	98*43*22mm
	FLS-42-1050 DALI-2 LD PRO	42W	220-240VAC	300-1050mA	2.5-49V	90%	0.95	98*43*22mm
	FLS-42-1050 DALI-2 LD1 PRO	42W	220-240VAC	150-1050mA	2.5-49V	90%	0.95	98*43*22mm
	FLS-60-1500 DALI-2 LD PRO	60W	220-240VAC	900-1500mA	9-49V	90%	0.95	113*43*25mm
	FLS-20-500 DALI-2 LN PRO	20W	220-240VAC	80-500mA	2.5-49V	87%	0.95	88*40*22mm
	FLS-30-700 DALI-2 LN PRO	30W	220-240VAC	150-700mA	2.5-49V	89%	0.95	98*43*22mm

Intelligent
- 0-10V



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-20-500 0-10 LD ADV	20W	220-240VAC	350-500mA	24-42V	86%	0.95	98*43*22mm
	FLS-30-700 0-10 LD ADV	30W	220-240VAC	550-700mA	24-42V	87%	0.95	113*43*25mm
	FLS-42-1050 0-10 LD ADV	42W	220-240VAC	700-1050mA	24-42V	88%	0.95	113*43*25mm
	FLS-60-1500 0-10 LD ADV	60W	220-240VAC	1150-1500mA	24-42V	89%	0.95	123*43*25mm

ON/OFF
- Slim



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-8-500 LA	8W	220-240VAC	150-500mA	2.5-48V	82%	0.90	115*30*20.5mm
	FLS-18-1050 LA	18W	220-240VAC	550-1050mA	2.5-33V	85%	0.95	115*30*20.5mm

ON/OFF
- DIP-switch



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-21-500 LD1 EXC	21W	220-240VAC	350-500mA	27-42V	85%	0.95	88*40*22mm
	FLS-30-700 LD1 EXC	30W	220-240VAC	550-700mA	9-42V	89%	0.95	88*40*22mm
	FLS-38-900 LD1 EXC	38W	220-240VAC	750-900mA	9-42V	89%	0.95	88*40*22mm
	FLS-40-1050 LD1 EXC	40W	220-240VAC	900-1050mA	9-42V	90%	0.95	88*40*22mm
	FLS-21-500 LD	21W	220-240VAC	150-500mA	10-42V	85%	0.95	97*43*30mm
	FLS-42-1050 LD PRO	42W	220-240VAC	150-1050mA	2.5-42V	89%	0.95	98*43*22mm
	FLS-42-1050 LD1 ADV	42W	220-240VAC	300-1050mA	9-40V	89%	0.95	98*43*22mm

MINI

ON/OFF
- DIP-switch



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FLS-20-500 LD1 PRO	20W	220-240VAC	350-500mA	27-40V	93%	0.95	98*43*22mm
	FLS-30-700 LD1 PRO	30W	220-240VAC	550-700mA	27-40V	94%	0.95	98*43*22mm
	FLS-38-900 LD1 PRO	38W	220-240VAC	750-900mA	27-40V	94%	0.95	98*43*22mm
	FLS-42-1050 LD1 PRO	42W	220-240VAC	900-1050mA	27-40V	94%	0.95	98*43*22mm

TRACK


Intelligent
- DALI-2



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FDS-42-1050 DALI-2 LD PRO	42W	220-240VAC	300-1050mA	2.5-42V	89%	0.95	202*31*42mm

ON/OFF
- Three Phases



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	FDS-40-1050 LD2 PRO	40W	220-240VAC	300-1050mA	9-40V	90%	0.95	133*31*42mm

Intelligent
- DALI-2 DT8

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-45-24 DALI-2 DT8 LN ADV	45W	220-240VAC	0-1.88A	24V	89%	0.95	227*38*30mm
	LS-80-24 DALI-2 DT8 LN ADV	80W	220-240VAC	0-3.33A	24V	89%	0.95	318*38*30mm
	LS-150-24 DALI-2 DT8 LN ADV	150W	220-240VAC	0-6.25A	24V	90%	0.95	318*38*30mm
	LS-45-24 DALI-2 DT8 LIi	45W	220-240VAC	0-1.88A	24V	89%	0.95	227*38*30mm
	LS-80-24 DALI-2 DT8 LIi	80W	220-240VAC	0-3.33A	24V	89%	0.95	318*38*30mm
	LS-150-24 DALI-2 DT8 LIi	150W	220-240VAC	0-6.25A	24V	91%	0.95	318*38*30mm

Intelligent
- DALI-2

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-45-12 DALI-2 LIi	45W	220-240VAC	0-3.75A	12V	90%	0.95	168*38*30mm
	LS-45-24 DALI-2 LIi	45W	220-240VAC	0-1.88A	24V	87%	0.95	168*38*30mm
	LS-80-12 DALI-2 LIi	80W	220-240VAC	0-6.67A	12V	90%	0.95	227*38*30mm
	LS-80-24 DALI-2 LIi	80W	220-240VAC	0-3.33A	24V	89%	0.95	227*38*30mm
	LS-150-24 DALI-2 LIi	150W	220-240VAC	0-6.25A	12V	91%	0.95	318*38*30mm
	LS-150-48 DALI-2 LIi	150W	220-240VAC	0-10.41A	24V	91%	0.95	318*38*30mm
	LS-250-24 DALI-2 LI	250W	220-240VAC	0-5.21A	24V	91%	0.95	431*45*30mm
	LS-250-48 DALI-2 LI	250W	220-240VAC	0-10.41A	48V	91%	0.95	431*45*30mm

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	MS-30-24 DALI-2 LI	45W	220-240VAC	0-1.88A	24V	87%	0.95	168*38*30mm
	MS-60-24 DALI-2 LI	80W	220-240VAC	0-3.33A	24V	89%	0.95	227*38*30mm
	MS-100-24 DALI-2 LI	120W	220-240VAC	0-6.25A	24V	91%	0.95	318*38*30mm

Intelligent
- 0-10V

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-45-24 0-10 LI	45W	220-240VAC	0-1.88A	24V	87%	0.95	168*38*30mm
	LS-80-24 0-10 LI	80W	220-240VAC	0-3.33A	24V	89%	0.95	227*38*30mm
	LS-150-24 0-10 LI	150W	220-240VAC	0-6.25A	24V	92%	0.95	318*38*30mm
	LS-250-24 0-10 LI	250W	220-240VAC	0-10.41A	24V	91%	0.95	431*45*30.5mm

ON/OFF
- Ultrathin

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	US-30-12 LI EXC	30W	220-240VAC	0-2.5A	12V	88%	0.95	238*30*16mm
	US-30-24 LI EXC	30W	220-240VAC	0-1.25A	24V	88%	0.95	238*30*16mm
	US-60-12 LI EXC	60W	220-240VAC	0-5A	12V	88%	0.95	298*30*16mm
	US-60-24 LI EXC	60W	220-240VAC	0-2.5A	24V	88%	0.95	298*30*16mm
	US-100-12 LI EXC	100W	220-240VAC	0-8.33A	12V	90%	0.95	353*30*18mm
	US-100-24 LI EXC	100W	220-240VAC	0-4.17A	24V	90%	0.95	353*30*18mm
	US-150-24 LI EXC	150W	220-240VAC	0-6.25A	24V	93%	0.95	353*30*18mm
	US-150-48 LI EXC	150W	220-240VAC	0-3.13A	48V	93%	0.95	353*30*18mm
	US-200-24 LI EXC	200W	220-240VAC	0-8.33A	24V	93%	0.95	383*30*18mm
	US-200-48 LI EXC	200W	220-240VAC	0-4.17A	48V	93%	0.95	383*30*18mm

ON/OFF
- Square Shape

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	SS-6-12 MB	6W	220-240VAC	0-0.5A	12V	75%	0.75	52*43.5*22.5mm
	SS-6-24 MB	6W	220-240VAC	0-0.25A	24V	75%	0.75	52*43.5*22.5mm
	SS-12-12 MB	12W	220-240VAC	0-1A	12V	83%	0.85	68.5*35*23mm
	SS-12-24 MB	12W	220-240VAC	0-0.5A	24V	83%	0.85	68.5*35*23mm
	SS-18-12 MB	18W	220-240VAC	0-1.5	12V	80%	0.85	68.5*35*23mm
	SS-18-24 MB	18W	220-240VAC	0-0.75A	24V	80%	0.85	68.5*35*23mm

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	SS-30-12 LB	30W	220-240VAC	0-2.75A	12V	85%	0.95	95*53*23.2mm
	SS-30-24 LB	30W	220-240VAC	0-1.25A	24V	85%	0.95	95*53*23.2mm
	SS-45-12 LB	45W	220-240VAC	0-3.75A	12V	85%	0.95	95*53*23.2mm
	SS-45-24 LB	45W	220-240VAC	0-1.88A	24V	85%	0.95	95*53*23.2mm
	SS-60-24 LB	60W	220-240VAC	0-2.5A	24V	87%	0.95	110.5*59.5*32.5mm

ON/OFF
- Slim

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-12-12 MI	12W	220-240VAC	0-1A	12V	83%	0.85	100*42*24.5mm
	LS-12-24 MI	12W	220-240VAC	0-0.5A	24V	83%	0.85	100*42*24.5mm
	LS-20-12 MI	20W	220-240VAC	0-1.67A	12V	80%	0.85	115*45*28mm
	LS-20-24 MI	20W	220-240VAC	0-0.83A	24V	80%	0.85	115*45*28mm

ON/OFF
- Slim



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	LS-30-12 LI EXC	30W	220-240VAC	0-2.5A	12V	87%	0.95	136*38*28mm
	LS-30-24 LI EXC	30W	220-240VAC	0-1.25A	24V	87%	0.95	136*38*28mm
	LS-60-12 LI EXC	60W	220-240VAC	0-5A	12V	88%	0.95	168*38*30mm
	LS-60-24 LI EXC	60W	220-240VAC	0-2.5A	24V	88%	0.95	168*38*30mm
	LS-75-12 LI EXC	75W	220-240VAC	0-6.25A	12V	88%	0.95	168*38*30mm
	LS-75-24 LI EXC	75W	220-240VAC	0-3.13A	24V	89%	0.95	168*38*30mm
	LS-75-48 LI EXC	75W	220-240VAC	0-1.56A	48V	9%	0.95	168*38*30mm
	LS-120-24 LI EXC	120W	220-240VAC	0-5A	24V	93%	0.95	227*38*30mm
	LS-120-48 LI EXC	120W	220-240VAC	0-2.5A	48V	93%	0.95	227*38*30mm
	LS-150-24 LI EXC	150W	220-240VAC	0-6.25A	24V	93%	0.95	227*38*30mm
	LS-150-48 LI EXC	150W	220-240VAC	0-3.13A	48V	93%	0.95	227*38*30mm
	LS-200-24 LI EXC	200W	220-240VAC	0-8.33A	24V	93%	0.95	318*45*30mm
	LS-200-48 LI EXC	200W	220-240VAC	0-4.17A	48V	93%	0.95	318*45*30mm
	LS-250-24 LI EXC	250W	220-240VAC	0-10.4A	24V	93%	0.95	318*45*30mm
	LS-250-48 LI EXC	250W	220-240VAC	0-5.2A	48V	93%	0.95	318*45*30mm

ON/OFF
- Switch Power Supply



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	MH-60-24 LI	60W	100-240VAC	0-2.5A	24V	88.5%	0.9	141*55*27mm
	MH-60-36 LI	60W	100-240VAC	0-1.67A	36V	89%	0.9	141*55*27mm
	MH-60-48 LI	60W	100-240VAC	0-1.25A	48V	89.5%	0.9	141*55*27mm
	MH-100-24 LI	100W	100-240VAC	0-4.17A	24V	88.5%	0.9	152*55*27mm
	MH-100-36 LI	100W	100-240VAC	0-2.78A	36V	89%	0.9	152*55*27mm
	MH-100-48 LI	100W	100-240VAC	0-2.08A	48V	89.5%	0.9	152*55*27mm
	MH-200-24 LI	200W	100-240VAC	0-8.33A	24V	92%	0.9	195*55*27mm
	MH-200-36 LI	200W	100-240VAC	0-5.56A	36V	92.5%	0.9	195*55*27mm
	MH-200-48 LI	200W	100-240VAC	0-4.17A	48V	92.5%	0.9	195*55*27mm
	MH-300-24 LI	300W	100-240VAC	0-12.5A	24V	92.5%	0.9	224*62*32mm
	MH-300-36 LI	300W	100-240VAC	0-8.33A	36V	93%	0.9	224*62*32mm
	MH-300-48 LI	300W	100-240VAC	0-6.25A	48V	93%	0.9	224*62*32mm
	MH-400-24 LI	400W	100-240VAC	0-16.66A	24V	93.5%	0.9	231*79*32mm
	MH-400-36 LI	400W	100-240VAC	0-11.11A	36V	93.5%	0.9	231*79*32mm
	MH-400-48 LI	400W	100-240VAC	0-8.33A	48V	93.5%	0.9	231*79*32mm



ON/OFF
- Switch Power Supply

	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	MS-60-24 SI	60W	220-240VAC	0-2.5A	24V	89%	0.50	128*37*27.5mm
	MS-100-24 SI	100W	220-240VAC	0-4.17A	24V	89%	0.50	162*51*27.5mm
	MS-150-24 SI	150W	220-240VAC	0-6.25A	24V	90%	0.50	198*51*27.5mm
	MS-200-24 SI	200W	220-240VAC	0-8.33A	24V	90%	0.50	198*51*27.5mm
	MS-250-24 SI	250W	220-240VAC	0-10.42A	24V	90%	0.50	228*51*27.5mm
	MS-300-24 SI	300W	220-240VAC	0-12.5A	24V	90%	0.50	248*51*27.5mm

ON/OFF
- IP44



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	SH-8-12 IP44 MB	8W	220-240VAC	0-0.67A	12V	80%	0.60	92*36*25mm
	SH-8-24 IP44 MB	8W	220-240VAC	0-0.33A	24V	80%	0.60	92*36*25mm
	SH-16-12 IP44 MB	12W	220-240VAC	0-1A	12V	84%	0.60	92*36*25mm
	SH-16-24 IP44 MB	12W	220-240VAC	0-0.5A	24V	84%	0.60	92*36*25mm
	SH-35-12 IP44 LB	18W	220-240VAC	0-1.5A	12V	86%	0.60	92*36*25mm
	SH-35-24 IP44 LB	18W	220-240VAC	0-0.75A	24V	86%	0.60	92*36*25mm

ON/OFF
- IP67



	Model	Power	Input Voltage	Output Current	Output Voltage	Efficiency	Power Factor	Size (L*W*H)
	VTS-24-12 IP67 L	24W	220-240VAC	0-2A	12V	86%	0.95	118*35*26mm
	VTS-24-24 IP67 L	24W	220-240VAC	0-1A	24V	86%	0.95	118*35*26mm
	VTS-40-12 IP67 L	40W	220-240VAC	0-3.34A	12V	86%	0.95	148*42*30mm
	VTS-40-24 IP67 L	40W	220-240VAC	0-1.67A	24V	88%	0.95	148*42*30mm
	VTS-60-12 IP67 L	60W	220-240VAC	0-5A	12V	87%	0.95	162.5*42.5*32mm
	VTS-60-24 IP67 L	60W	220-240VAC	0-2.5A	24V	89%	0.95	162.5*42.5*32mm
	VTS-100-12 IP67 L	100W	220-240VAC	0-8.33A	12V	87%	0.95	190*52*33mm
	VTS-100-24 IP67 L	100W	220-240VAC	0-4.17A	24V	89%	0.95	190*52*33mm
	VTS-160-12 IP67 L	160W	220-240VAC	0-13.3A	12V	91%	0.95	190*52*37.5mm
	VTS-160-24 IP67 L	160W	220-240VAC	0-6.67A	24V	92%	0.95	190*52*37.5mm
	VTS-160-48 IP67 L	160W	220-240VAC	0-3.33A	48V	92%	0.95	190*52*37.5mm